

CADDXFPV

BABY RATEL 2 USER MANUAL




V1.0

Connection

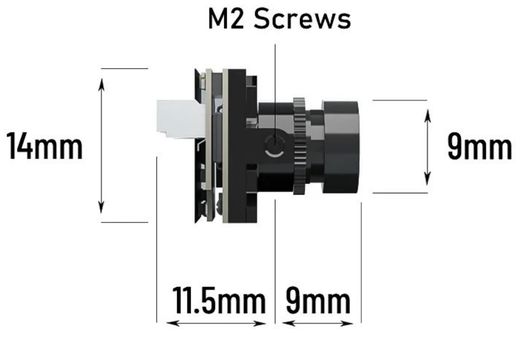

*This product is a visible light camera.

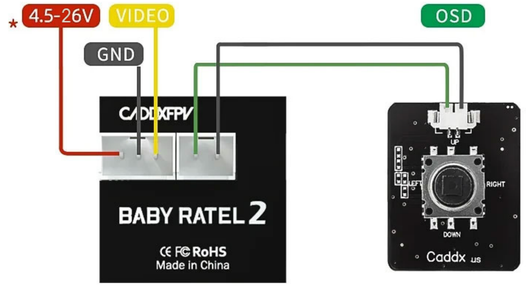

*5V-160mAH
12V-70mAH

Short press the menu board to enter osd settings

- 4.5-26V
- GND
- Video out
- OSD

Camera menu

MAIN MENU

```
AE                  ↵
WB                  ↵
DAY&NIGHT           ↵
IMAGE ENHANCE       ↵
VIDEO SETTING       ↵
LANGUAGE
          <ENGLISH>
RESET
SAVE EXIT
EXIT
```

AE

```
BRIGHTNESS     <12>
EXPOSURE MODE
               GLOBE
ADVANCED
RETURN
```

BRIGHTNESS (0-30)
EXPORSURE
MODE (GLOBE/ BLC)
BLC (1-8)

WE

```
MODE
          <ATW>
RETURN
```

DAY NIGHT

```
MODE
          <EXT>
RETURN
```

MODE (ATW/MWB)
RGAIN (0-32)
BGAIN (0-32)

MODE (BW/AUTO /COLOR/EXT)

IMAGE ENHANCE

```
CONTRAST
          <AUTO>
SHARPNESS
          <AUTO>
COLOR GAIN
          <AUTO>
3DNR
          <AUTO>
RETURN
```

VIDEO SETTING

```
VIDEO STANDARD
          <PAL>
HD FORMAT
          CVBS
IMAGE RATIO
          <4:3>
D-WDR
          <OPEN>
RETURN
```

CONTRAST (MANUAL/ AUTO)
SHARPNESS (MANUAL/AUTO)
COLOR GAIN (MANUAL/AUTO)
3DNR (MANUAL/AUTO)


VIDEO STANDARD (PAL/NTSC)
IMAGE RATIO (4:3/16:9)
WDR (OPEN/CLOSE)

Specifications

Model	Baby Ratel 2
Image Sensor	1/1.8" Inch sensor
Horizontal Resolution	1200TVL
TV System	NTSC & PAL (changeable)
IMAGE	16:9 & 4:3 (changeable)
WDR	Super WDR (HDR)
Min. Illumination	Starlight
FOV	165°
Electronic Shutter	PAL: 1/50~100,000;
	NTSC: 1/60~100,000
Camera OSD	Separate OSD
Language	(ENGLISH/中文/繁體中文/русский
	/ESPAÑOL/ITALIANO/ FRANCAIS/
	POLSKIM/ PORTUGUES/日本語)
Day/Night	Auto/Color/B&W/EXT
Dimensions	14mm*14mm
Wide Power Input	DC 4.5–26V
Weight	3 g (N.W.)


CADDXFPV

BABY RATEL 2 用戶手册




V1.0

安装连线

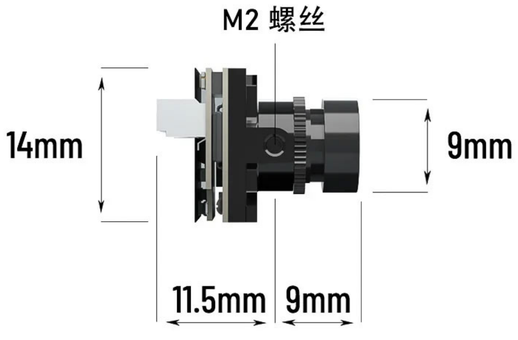

*此产品为可见光摄像头

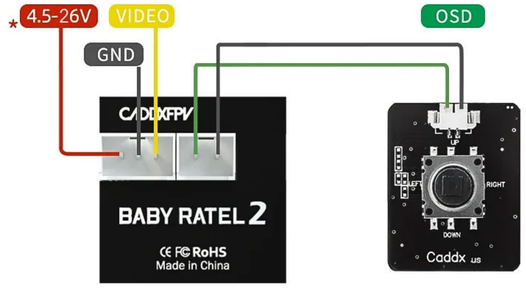

*5V-160mAH
12V-70mAH

短按菜单板中键进入OSD设置
设置完成后移除OSD菜单板

- 4.5-26V
- GND
- Video out
- OSD

相机osd菜单

主菜单

```
曝光                ↵
白平衡              ↵
日夜切换            ↵
图像增强            ↵
视频设置            ↵
语言          <中文>
恢复出厂设置
保存退出
```

曝光

```
亮度           <12>
曝光模式       全局
高级
返回
```

亮度(0-30)
曝光模式(全局/背光补偿)
背光补偿(1-8)

白平衡

```
模式
自动跟踪白平衡
返回
```

日夜切换

```
模式
<外部触发>
返回
```

模式（自动跟踪白平衡/手动白平衡）
红色增益(0-32)
蓝色增益(0-32)

模式(外部触发/内部触发/黑白/彩色)

图像增强

```
对比度
          <自动>
锐度
          <自动>
饱和度
          <自动>
3D降噪
          <自动>
返回
```

视频设置

```
视频制式
          <PAL>
同轴高清制式
          CVBS
图像比例  <4:3>
D-WDR     <开>
返回
```

对比度 自动/手动
锐度 自动/手动
饱和度 自动/手动
3D降噪 自动/手动

视频制式 <PAL/NTSC>
图像比例 <4:3/16:9>
D-WDR(开/关)

产品规格

型号	Baby Ratel 2
传感器	1/1.8" Inch sensor
水平分辨率	1200TVL
视频制式	NTSC & PAL (changeable)
比例	16:9 & 4:3 (changeable)
WDR	Super WDR (HDR)
最低照度	Starlight
视场角	165°
电子快门	PAL: 1/50~100,000;
	NTSC: 1/60~100,000
相机OSD	Separate OSD
语言	(ENGLISH/中文/繁體中文/русский
	/ESPAÑOL/ITALIANO/ FRANCAIS/
	POLSKIM/ PORTUGUES/日本語)
场景模式	Auto/Color/B&W/EXT
尺寸	14mm*14mm
宽电压输入	DC 4.5–26V
重量	3 g (N.W.)